


# OJ Wall

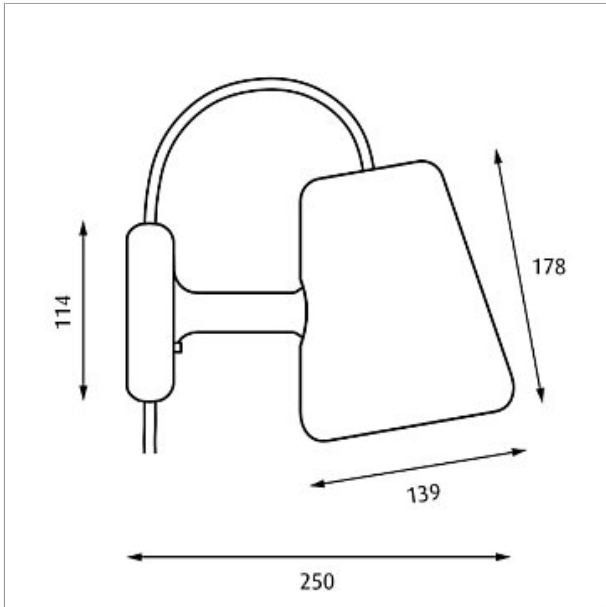

Design: Ole Jensen

Concept: The fixture emits soft comfortable light. The light distribution is glare-free. The shade design seeks to create soft, decorative illumination of the top and bottom of the shade, giving the impression that the light is being squeezed out of the openings. The thickness and surface of the shades 'retains' the light, thereby creating the perception that the shade is illuminated from within. A detail which is achieved in part due to the structure of the surface. The angle of the shade concentrates the light, and the adjustable head further permits the light distribution to be optimised.

Finish: White with a structured surface, powder coated.

Material: Arm/Wall flange: Die cast aluminium. Shade: Pressed steel.

Mounting: Cable type: Textile cable with plug. Cable length: Cable length: 2.5m. The version for installation above the optional junction box is without additional cable. Light control: Cord drive.

Weight: Max. 2kg.

Class: Ingress protection IP20. Electric shock protection II or I.

Product code	Light source	Finish	Class	Cable type
OJ-W	1x18W TC-DSE/TC-HSE E14	WHT COL TEXT	I II	W/PLUG WO/PLUG

Specification notes  
The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On [www.louispoulsen.com](http://www.louispoulsen.com) we update a list of recommendable light sources.

Info notes  
Comes with an energy-saving light source.

**louis  
poulsen**



Scan the code for more information